

DEMASLED

Datasheet | Ficha Técnica

TSMD-27RGB-W

INDOOR | INTERIORES



**Certified UL Recognized
SMD5050 High Intensity RGB and
6.500°K Cool White LED Strip**

*Tira LED de alta intensidad RGB y
Blanco Frío de 6.500°K, SMD5050,
con certificación UL Recognized*




we are around the world


WWW.DEMASLED.COM

Certified UL Recognized SMD5050 High Intensity RGB and 6.500°K Cool White LED Strip
| Tira LED de alta intensidad RGB y Blanco Frío de 6.500°K, SMD5050, con certificación UL Recognized

► TSMD-27RGB-W



Packing | Embalaje

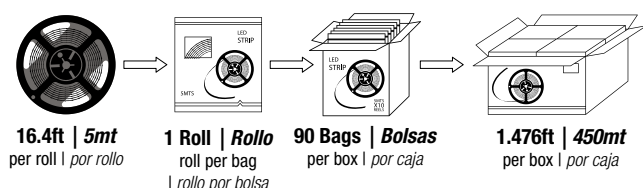

Carton Dimensions Dimensiones del paquete	19.68*18.50*9.84in 50*47*25cm
Bags per carton Bolsas por caja	90 PCS
Quantity Cantidad	1.476ft 450mt
Weight Peso	26.94 lbs 12.22 kg

LED Type Tipo de LED	SMD 5050
Input Voltage Tensión de Entrada	DC 12V
Power Potencia	14.4W/mt
Total Power Potencia Total	72W
Amperes per roll Amperage por rollo	6A
LED Quantity Cantidad de LED	60 LEDs/mt
Total LED Quantity Cantidad total de LED	300
Color	RGB + Cool White RGB + Blanco Frío
Wavelengths CCT	R: 620nm - 625nm G: 525nm - 530nm B: 465nm - 470nm CW: 6.500°K
Brightness Intensidad Lumínica	600 Lm/mt
Total Brightness Intensidad Lumínica Total	3.000 Lm
Beam Angle Ángulo de Apertura	120°
Dimmable Regulable	Yes SI
Operating Temperature Temperatura de Trabajo	-13°F +140°F -25°C +60°C
Storage Temperature Temperatura Almacenaje	-13°F +158°F -25°C +70°C
Lifespan Vida Útil	50.000 HRS
Use Uso	Indoors Interiores
IP Grade Grado IP	IP33
Length Largo	16.4ft 5mt
Width Ancho	0.4in 10mm

Certifications | Certificaciones



0000000370898