

|   |  |
|---|--|
| 1 |  |
| 2 |  |
| 3 |  |

Electronic Data

(ECR编号)

| Parameter            | Unit | Min. | Rated | Max. | Remark  |
|----------------------|------|------|-------|------|---------|
| Supply Voltage       | V    | 198  | 230   | 264  |         |
| Supply Frequency     | Hz   |      | 50    |      | 适用于60HZ |
| Supply Current       | mA   | 44   | 49    | 54   | 54mA    |
| Power Consumption    | W    | 5,1  | 5,7   | 6,3  |         |
| Power Factor         | -    | 0,5  |       |      |         |
| Drive output voltage | V    |      | 37    |      |         |
| Drive output current | mA   | 126  | 140   | 154  |         |


LED Data

|                  |   |       |  |
|------------------|---|-------|--|
| LED Circuit Mode | - | 6 PCS |  |
| LED Vendor       | - |       |  |

Chromaticity Data

| Parameter                                | Units | Min. | Rated | Max. | Remark                         |
|------------------------------------------|-------|------|-------|------|--------------------------------|
| Luminous Flux                            | lm    | 486  | 540   |      |                                |
| Max Luminous Intensity                   | cd    |      |       |      | 95                             |
| Beam Angle                               | °     |      |       |      | 0.5 Imax: 140<br>0.1 Imax: 250 |
| Luminous Efficiency                      | lm/W  | 85   | 95    |      |                                |
| CRI                                      | -     | 80   |       |      |                                |
| CCT                                      | K     | 4745 | 5028  | 5311 |                                |
| SCDM                                     | -     |      |       | 6    | ANSI                           |
| Dominant Wavelength                      | nm    |      |       |      |                                |
| Dimming                                  | %     |      |       |      |                                |
| Rated luminous flux in a 90°(Φ90°)       | lm    |      |       |      |                                |
| 120°Rated luminous flux in a 120°(Φ120°) | lm    |      |       |      |                                |
| Energy Efficiency Index (EEI)            | -     |      | 0,12  |      | A+                             |


Light Distribution Curve



Operating Condition

| Parameter                     | Units | Min. | Rated | Max. | Remark      |
|-------------------------------|-------|------|-------|------|-------------|
| Operating Ambient Temperature | ℃     | -20  | 25    | 40   |             |
| Rated Lamp Life               | H     |      | 25000 |      | 25℃,L70,F50 |
| Starting Time                 | s     |      | 0,2   |      |             |
| Lamp Warms-up time to 60% Φ   | s     |      | 0,13  |      |             |
| Lamp Warms-up time to 95% Φ   | s     |      | 0,14  |      |             |

Structure Data
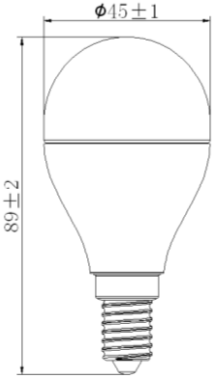
| Parameter                           | Units | Min.                                                                                | Rated | Max. | Remark |
|-------------------------------------|-------|-------------------------------------------------------------------------------------|-------|------|--------|
| Weight                              | g     | 38                                                                                  | 43    | 47   |        |
| Base Type                           | -     | E14                                                                                 |       |      |        |
| Housing Material                    | -     |                                                                                     |       |      |        |
| Cover Material                      | -     | PC                                                                                  |       |      |        |
| Lens Material                       | -     |                                                                                     |       |      |        |
| Reflector Sheet Material            | -     |                                                                                     |       |      |        |
| Heatsink Material&Surface Treatment | -     | AL1060                                                                              |       |      |        |
| Drawings                            | mm    |  |       |      |        |

Product Certificate

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |  |  |  |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Standards          | <div><input checked="" type="checkbox"/> IEC62560及其等效标准<input type="checkbox"/> IEC62612及其等效标准<input type="checkbox"/> UL1993+UL8750</div> <div><input checked="" type="checkbox"/> CISPR15及其等效标准<input checked="" type="checkbox"/> IEC62471<input type="checkbox"/> FCC 47 part 15</div> <div><input checked="" type="checkbox"/> IEC61000-3-2/3及其等效标准<input checked="" type="checkbox"/> No 1194/2012 (ErP)<input type="checkbox"/> 其它</div> <div><input checked="" type="checkbox"/> IEC61547及其等效标准</div>                                                                                                        |  |  |  |  |
| Certificates       | <div><input checked="" type="checkbox"/> CE<input type="checkbox"/> EST<input type="checkbox"/> ENCE<input type="checkbox"/> PROCEL<input type="checkbox"/> NOM</div> <div><input type="checkbox"/> ETL/CETL<input type="checkbox"/> SAA<input type="checkbox"/> PSE<input type="checkbox"/> UL/CUL<input type="checkbox"/> 其它</div> <div><input type="checkbox"/> FCC<input type="checkbox"/> SABS<input type="checkbox"/> Energy Star<input type="checkbox"/> EEC</div> <div><input type="checkbox"/> CQC 安全<input type="checkbox"/> CQC节能<input checked="" type="checkbox"/> ErP<input type="checkbox"/> KC</div> |  |  |  |  |
| Other Requirements | ROHS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |  |  |  |