

DEMASLED

Datasheet | Ficha Técnica

TSMD-19MIXWWW

INDOOR | INTERIORES



**Certified UL Recognized
SMD2835 6.500°K Cool White &
2.300°K Warm White LED Strip**

*Tira de LED, SMD2835, Blanco Frío de
6.500°K y Blanco Cálido de 2.300°K
con certificación UL Recognized*



0000000370898



we are around the world

WWW.DEMASLED.COM


Certified UL Recognized SMD2835 6.500°K Cool White & 2.300°K Warm White LED Strip

| Tira de LED, SMD2835, Blanco Frío de 6.500°K y Blanco Cálido de 2.300°K con certificación UL Recognized

► TSMD-19MIXWWW



Packing | Embalaje

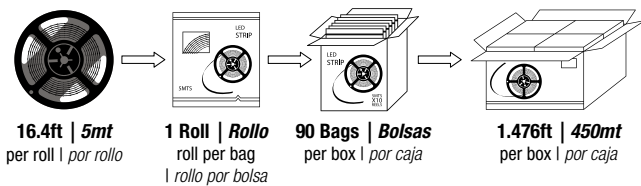

Carton Dimensions | Dimensiones del paquete 19.68*18.50*9.84in | 50*47*25cm

Bags per carton | Bolsas por caja 90 PCS

Quantity | Cantidad 1476ft | 450mt

Weight | Peso 22.22 lbs | 10.08 kg

LED Type | Tipo de LED SMD 2835

Input Voltage | Tensión de Entrada DC 12V

Power | Potencia 18W/mt

Total Power | Potencia Total 90W

Amperes per roll | Amperage por rollo 7.5A

LED Quantity | Cantidad de LED 120 LEDs/mt

Total LED Quantity | Cantidad total de LED 600

Color Cool White | Blanco Frío

CCT 6.500°K

Color Warm White | Blanco Cálido

CCT 2.300°K

Brightness | Intensidad Lumínica 880 Lm/mt

Total Brightness | Intensidad Lumínica Total 4.400 Lm

CRI >80Ra

Beam Angle | Ángulo de Apertura 120°

Dimmable | Regulable Yes | SI

Operating Temperature | Temperatura de Trabajo -13°F +140°F
| -25°C +60°C

Storage Temperature | Temperatura Almacenaje -13°F +158°F
| -25°C +70°C

Lifespan | Vida Útil 50.000 HRS

Use | Uso Indoors | Interiores

IP Grade | Grado IP IP33

Length | Largo 16.4ft | 5mt

Width | Ancho 0.3in | 8mm

Certifications | Certificaciones

